



YCT Series

Air Hydro Converter


- Usage Pressure 3~7bar
- Guaranteed Internal Pressure 10.5bar

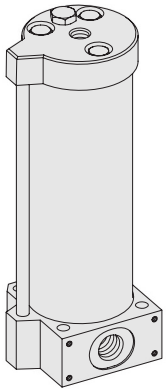

YCT 63x100

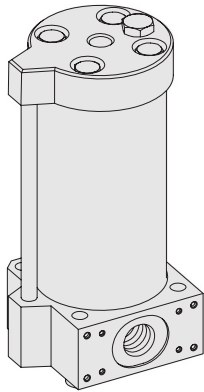

YCT 100x100

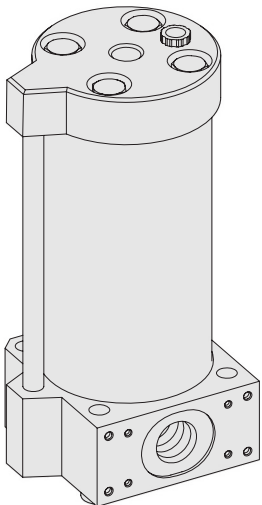

YCT 160x100

SPECIFICATION

Usage Pressure	3~7bar
Guaranteed Internal Pressure	10.5bar
Ambient & Fluid Temp.	5~50°C
Fluid	Tubin Oil, Hydercting Diameter(40~100cst)

The Material of Parts

- Base : Die-Cast Aluminium
- Tube : Aluminium Extruding
- Indicator Tube : Polycarbonate
- Floot : Bubble Resin
- Tie Rod : Carbon Iron
- Nut Part : STS304

* The specification on each item can be amended without any prenotice to improve a performance.
 * The specification on each item can be different from actual specification.

ORDERING NO.

YCT 63 - 100

Diameter of Converter

63	63mm
100	100mm
160	160mm

Standard Effective Stroke(Str)

	50	100	150	200	250	300	350	400	500	600	700	800
63	○	○	○	○	○	○	○	○	○	×	×	×
100	×	○	○	○	○	○	○	○	○	○	×	×
160	×	×	×	○	○	○	○	○	○	○	○	○

*Except to the above stroke statements, stroke design can be according to a quotation.